Der PERROT-RollcarT-V

Der PERROT-**RollcarT-V** fährt und regnet selbständig. Für den Einsatz auf großen Grünflächen, Sportanlagen, in Baumschulen und Gärtnereien.

Nach dem Öffnen des Wasserhahnes zieht sich der **RollcarT-V** an dem vorher ausgelegten Stahlseil über die zu beregnende Fläche. Am Ende der Fläche stellt der **RollcarT-V** das Wasser automatisch ab und stoppt die Beregnung. Der wasserführende Schlauch mit einem Durchmesser von 1” und einer Länge von mindestens 60 Metern (bei Sportanlagen) wird hinterher gezogen. Der Schlauch gehört nicht zum Lieferumfang.

The PERROT-RollcarT-V

The PERROT-**RollcarT-V** travels and irrigates on its own. Used mainly for large sized green areas, sport fields, nurseries and gardens.

The **RollcarT-V** starts moving as soon as the water supply is turned on and is slowly drawn along the lawn , along the previously layed out steel cable. At the end of the designated area the **RollcarT-V** automatically stops waterflow and irrigation.

The water supply hose with a diametre of 1“ and a length of minimum 60 m is drawn behind the cart (The hose is not included with the sprinkler cart **RollcarT-V**).

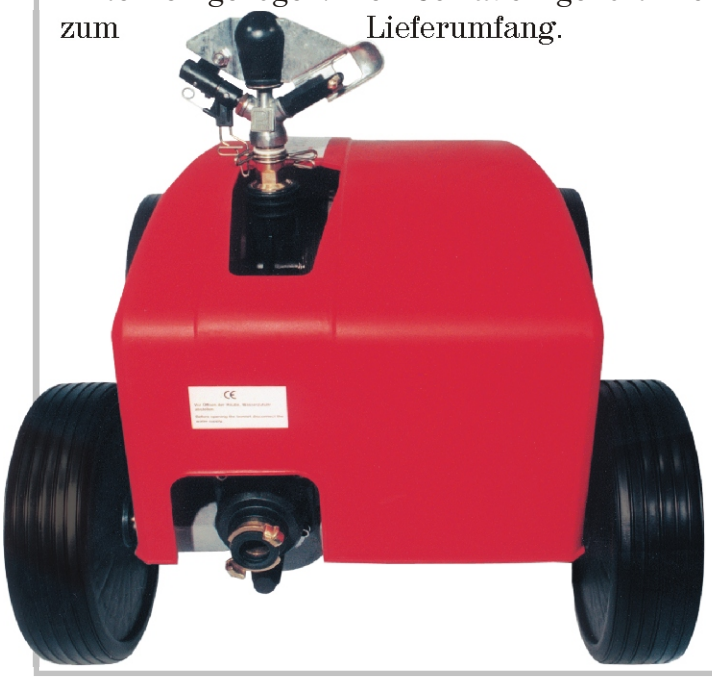

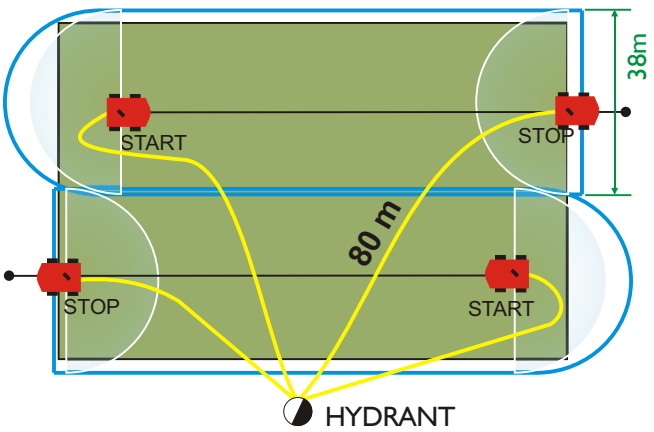

Anwendungsbeispiel – example of use

Produktvorteile

1. Vielfältige Anwendungsmöglichkeiten
Der eingesetzte Sektorenregner gestattet die Begrenzung von Beregnungsflächen. Beispielsweise kann eine Beregnung links oder rechts vom Regnerwagen ausgeschlossen werden.

2. Variable Wassermenge
Die stufenlose Geschwindigkeitsregulierung ermöglicht eine Anpassung der Wassermenge an den tatsächlichen Bedarf.

3. Gleichmäßige Wasserverteilung
Die Verteilungsgenauigkeit des ZE-Regners und der Gleichlauf des **RollcarT-V** Regnerwagens garantieren eine optimale Wasserverteilung.

4. Wartungsfreie Betriebssicherheit
Das gekapselte Getriebe ist besonders reibungsarm und praktisch wartungsfrei.

5. Handlichkeit
Die kompakte, geschlossene Bauweise macht das Arbeiten mit dem **RollcarT-V** zum Kinderspiel.

6. Rasenschonend
Bei entsprechender Einstellung des Beregnungssektors fährt der **RollcarT-V** stets über den trockenen Rasen.

Product-advantages

1. Multiuse
The part circle sprinkler allows the operator to define the area to be irrigated. For example irrigation right or left of the sprinkler cart or any sector of a circle can be achieved.

2. Variable waterflow
Through the infinite speed regulation the waterflow can be adjusted to suit each application.

3.Uniform water distribution
The precise distribution of the ZE sprinkler and the constant speed of the **RollcarT-V** guarantees an optimal water distribution.

4. Maintenance free
The sealed gears have a very low friction factor and are therefore practically maintenance free.

5. Convenience
The compact self contained design makes work with the **RollcarT-V** mere child's play.

6. Lawn friendly
Using a part circle sprinkler the **RollcarT-V** always travels on dry lawn.

Technische Daten

- Arbeitstempo: 10 bis 20 m/Std.
- Wasserdruck: 3,5 bar am Gerät
- Wasserverbrauch: 3,0 m^3/Std.
- Beregnungsbreite: 28 bis 36 m
- Beregnungslänge: 120 m
- Material: Alu, Messing, Kunststoff
- Abmessung: 77 x 47 x 40 cm
- Gewicht: 33,0 kg

Technical Data

- Travelling speed: 10 to 20 m/h
- Operating pressure: min 3,5 bar at unit
- Water consumption: 3,0 m^3/h
- Width of irrigation: 28 to 36 m
- Length of irrigation: 120 m
- Material: Alu, brass, ABS
- Overall measurements: 77 x 47 x 40 cm
- Total weight: 33,0 kg

Regnerbau Calw GmbH
Industriestrase 19-29
D 75382 Althengstett
Tel. 07051/162-0
Fax 07051/162-133
E-mail: perrot@perrot.de
Internet: www.perrot.de

Perrot
REGNERBAU CALW